


22557T-4V Dual Handle Wall Mount Lavatory Faucet -Lever
22557T-3S Dual Handle Wall Mount Lavatory Faucet -Cross

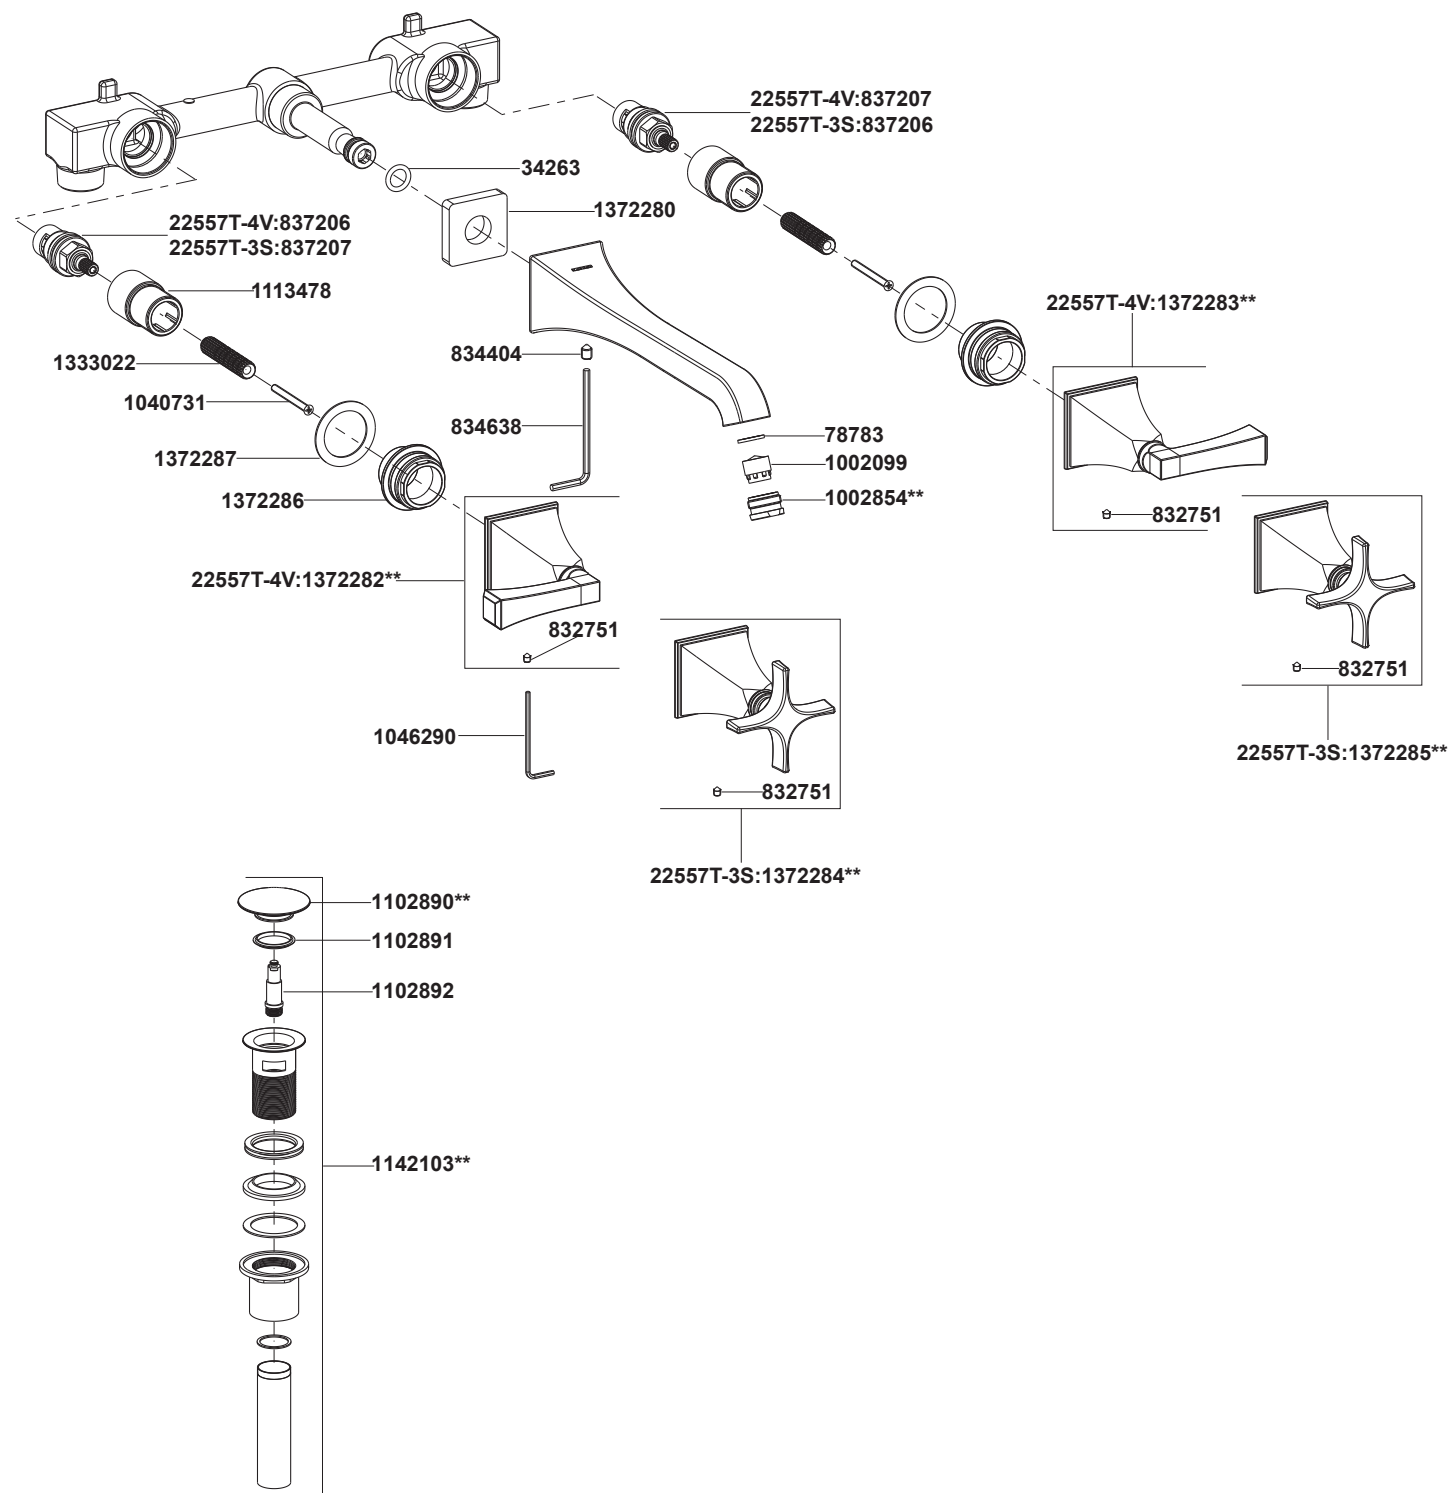

****Color code must be specified when ordering.**

22557T-4V Dual Handle Wall Mount Lavatory Faucet -Lever
22557T-3S Dual Handle Wall Mount Lavatory Faucet -Cross

BEFORE YOU BEGIN

All information is based on the latest product information available at the time of publication. Kohler Co. reserves the right to make changes in product characteristics, packaging, or availability at any time without notice. Please leave these instructions for the consumer. They contain important information.


NOTES:

1. Flush the water supply pipes thoroughly to remove debris.
2. Inspect the supply tubing for damage and leakage. Replace and maintain as necessary.
3. Observe local plumbing codes.
4. Check for leaks before covering the pipes, repair as needed.
5. Please ensure only apply water pressure test on the product, and empty the air in pipe and faucet thoroughly before the test. Please ensure test pressure below 0.8MPa and test duration within 30 minutes.

HANDLE OPERATION

For 22557T-4V, left handle opens with turning counter-clockwise, right handle opens with turning clockwise.
For 22557T-3S, left handle opens with turning clockwise, right handle opens with turning counter-clockwise.

ROUGH-IN DIMENSIONS

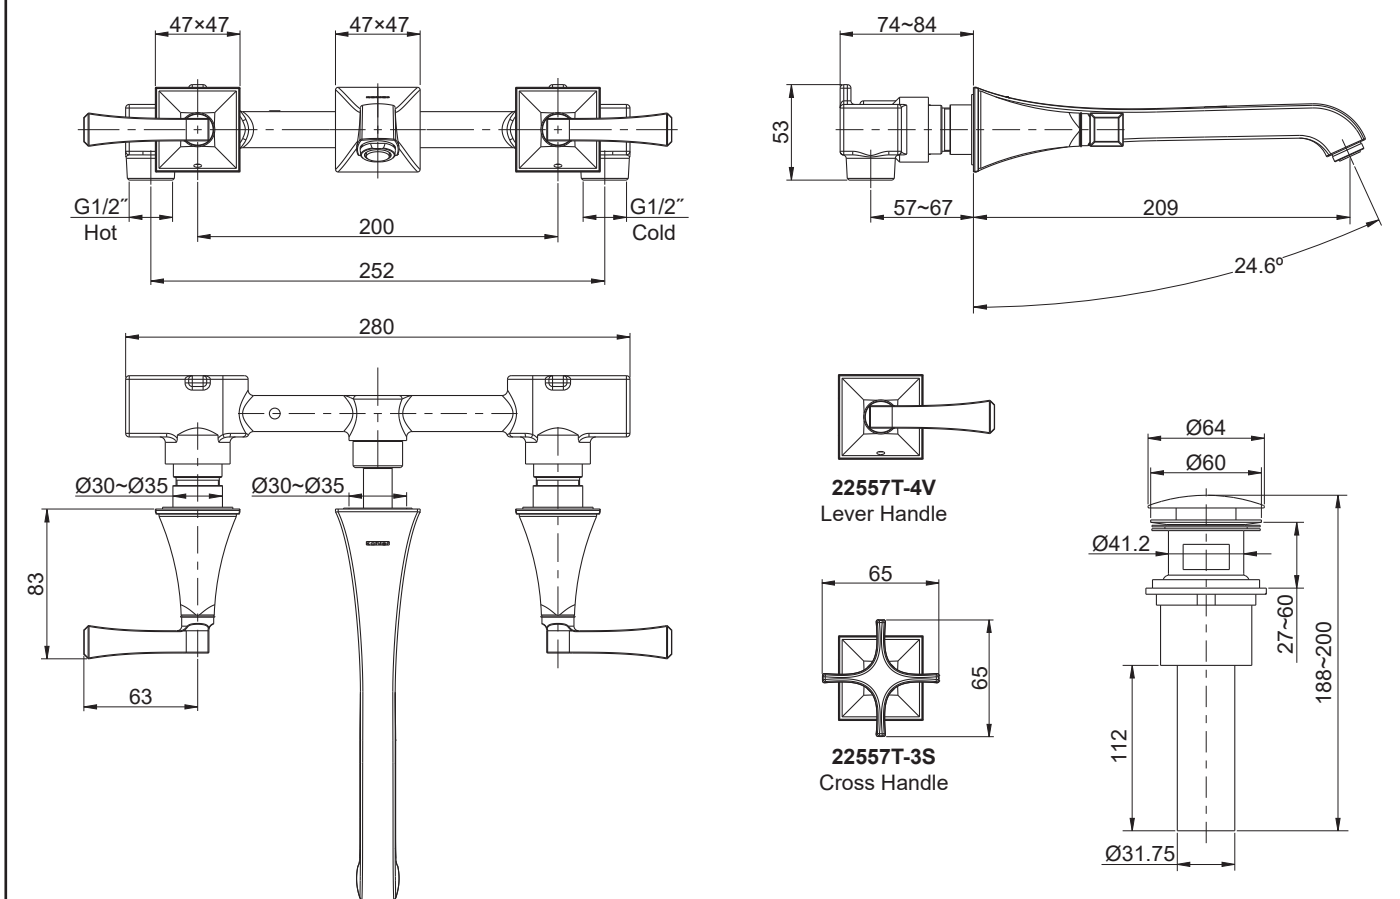

INSTALLATION


How to Install the Yoke

Determine where the yoke will be located on the wall. Make a suitable hole to install the yoke. Make sure the protectors(1) face front. Do not take off the protectors at this moment.

Connect the G1/2" water supply pipes(2) to the water inlets(3).

Keep the distance from centerline of water supplies to the finished surface must be between 57~67mm. Make sure the left supply pipe is the hot supply and connected to the end with red mark.


The out surface of the finished wall should be between the MAX and MIN marks on the protectors.

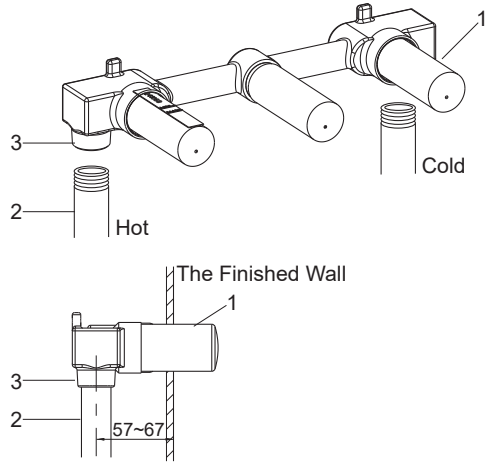

How to Install the Handles

Remove and discard the valve protectors after completing the finished wall.


Screw the connectors(4) onto the valves(5) until it is against the finished wall.

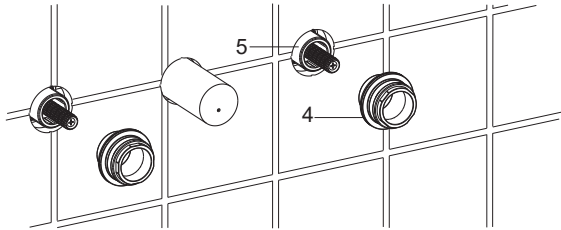


Place the handle kits(6) onto the connectors(4) with the valves closed.

NOTE: The handle kit with red washer should be installed on the left side.

Tighten the screws(8) with hex wrench(7) to secure the handle kits.

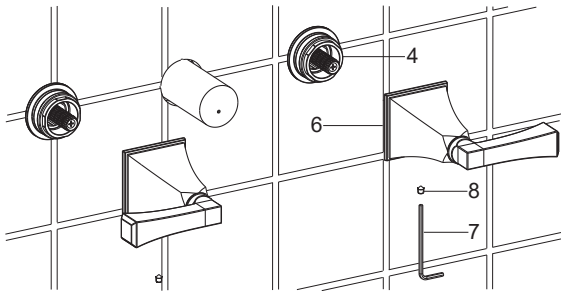

The figure shows the correct position of the handles when the installation is completed.

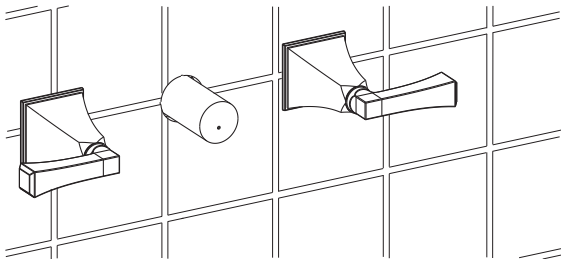


How to Install the Spout

Remove and discard the spout protector.

Loosen the screw(11) in the spout kit(10) with hex wrench(9).

Install the spout kit onto the connector(12) with its outlet downwards until it is against the finished wall. **NOTE:** Don't damage the O-ring (13) on the connector. Tighten the screw to secure the spout kit.

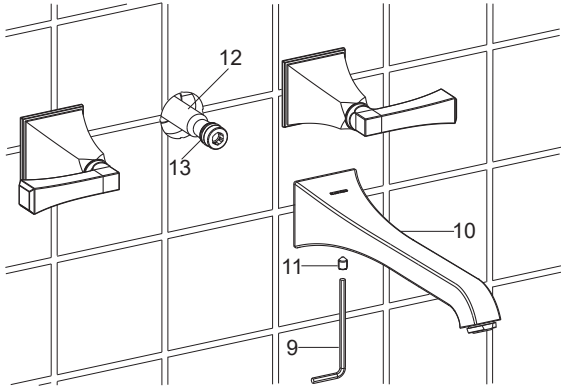


How to Install the Drain

Remove the locknut(14), plastic washer(15), rubber gasket(16) and tailpiece(17) from the drain body. Supply enough tape or sealant to tailpiece thread. Reinstall the tailpiece.

Insert the drain body into the lavatory. Install the rubber gasket (Tapered side up), plastic washer and locknut back to the drain body in turn. Tighten the locknut.


NOTE: If needed, apply a ring of plumbers putty or other sealants around the underside of the drain flange(18), instead of using rubber washer(19).

Do not reposition the drain after the locknut is tightened, or you may break the putty or sealant seal.

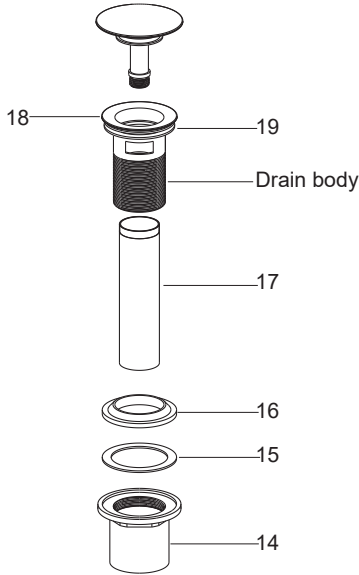

Replace the Washer and Piston Kit

Turn counter-clockwise to remove the stopper(20). Take out the washer(21). Replace with a new one. Turn counter-clockwise to remove the piston kit(22). Replace with a new one. Reinstall the stopper and washer.

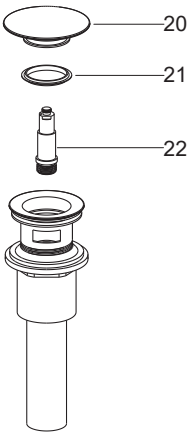


INSTALLATION CHECKOUT

Ensure that all coupling nuts are tight.

Ensure that the handles are in the off position.

Turn on the main water supply and drain, and check for leaks. Repair as needed.

Remove the aerator kit(23). Run hot and cold water through faucet for about one minute to remove any debris. Remove any debris from the aerator. Shut off the faucet. Reinstall the aerator.

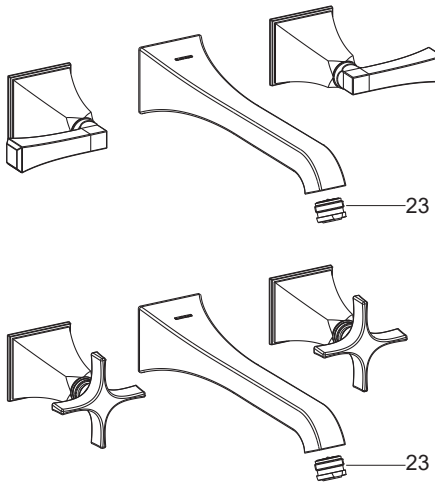

CLEANING INSTRUCTIONS

All Finishes: Clean the finish with mild soap and warm water. Wipe entire surface completely dry with clean soft cloth. Many cleaners may contain chemicals, such as ammonia, chlorine, toilet cleaner etc, which could adversely affect the finish and are not recommended for cleaning.

Do not use abrasive cleaners or solvents on Kohler faucets and fittings.