


- 21902T-4-3GC Etch Widespread Lavatory Faucet
- 21902T-4-3TR Vibrant Ombré Widespread Lavatory Faucet
- 21902T-4-3RS Vibrant Ombré Widespread Lavatory Faucet

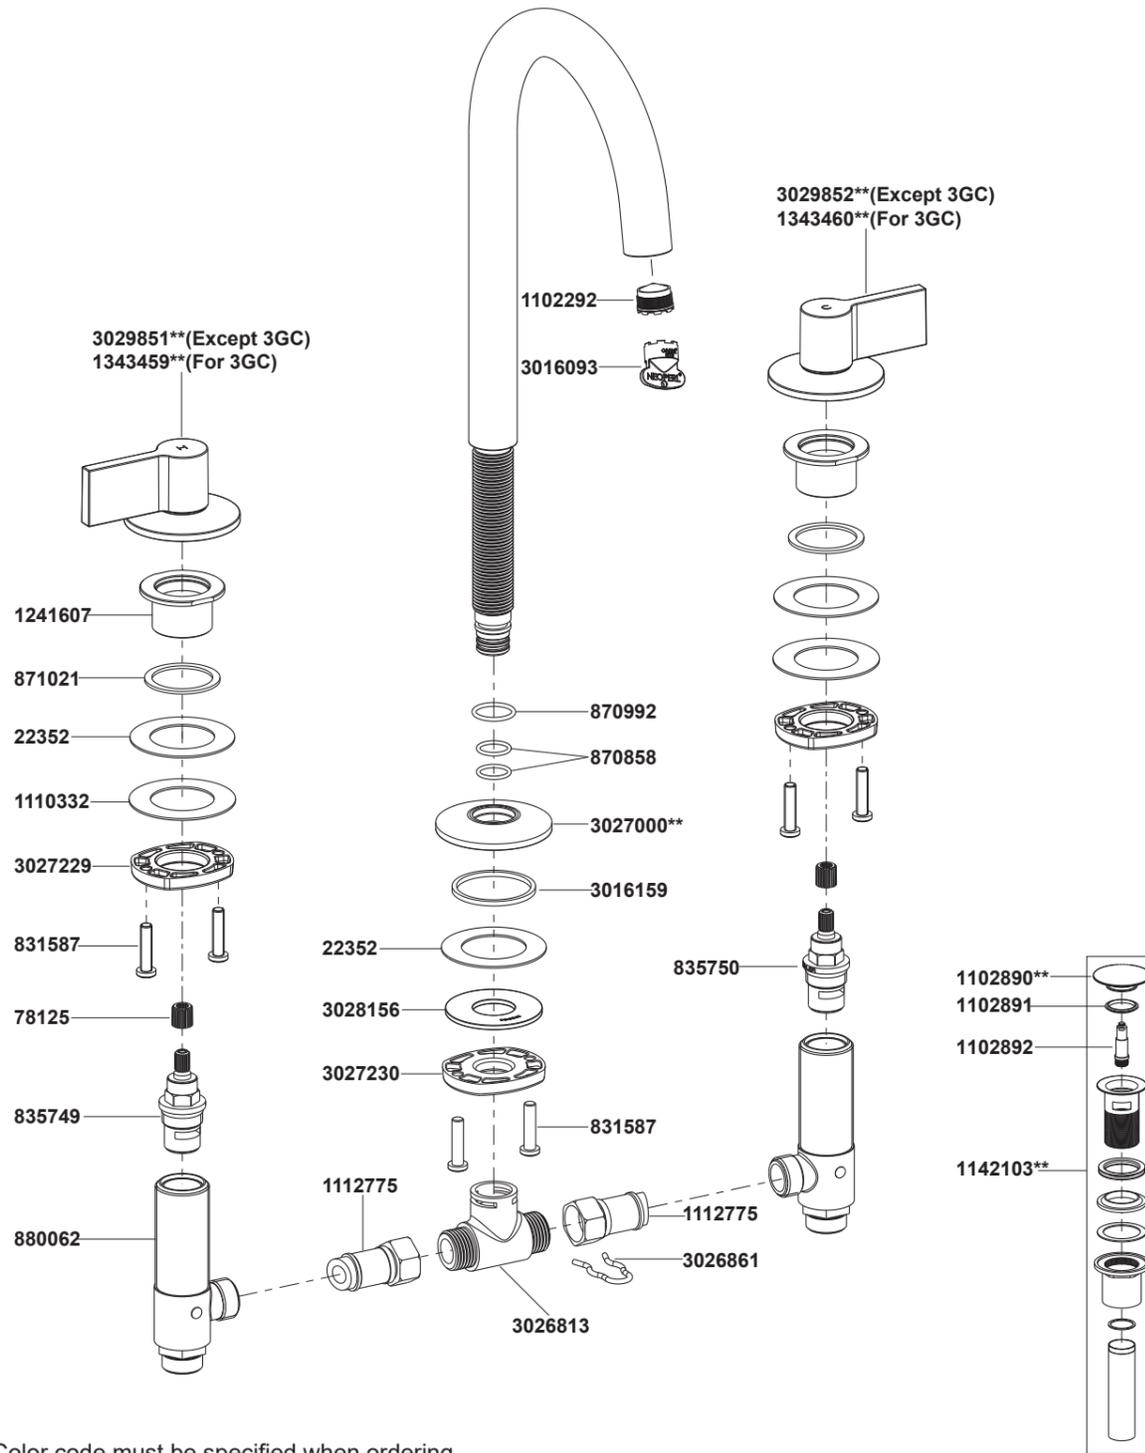

**Color code must be specified when ordering.

NOTE: For all Asia pacific regions (excluding China) add SP (SPxxxxxx**) in front of the part number when ordering.

- 21902T-4-3GC Etch Widespread Lavatory Faucet
- 21902T-4-3TR Vibrant Ombré Widespread Lavatory Faucet
- 21902T-4-3RS Vibrant Ombré Widespread Lavatory Faucet

BEFORE YOU BEGIN

All information is based on the latest product information available at the time of publication. Kohler Co. reserves the right to make changes in product characteristics, packaging, or availability at any time without notice. Please leave these instructions for the consumer. They contain important information.

NOTES:

1. Flush the water supply pipes thoroughly to remove debris.
2. If possible, install this faucet before installing the bath tub.
3. Inspect the supply tubing for damage and leakage. Replace and maintain as necessary.
4. Observe local plumbing codes.
5. Shut off the water supplies to the fitting.


HANDLE OPERATION

Right handle open with turning clockwise, left handle open with turning counter-clockwise.


STANDARD APPLICABLE

Special model meets or exceeds the following at date of manufacture: TIS

ROUGH-IN DIMENSIONS

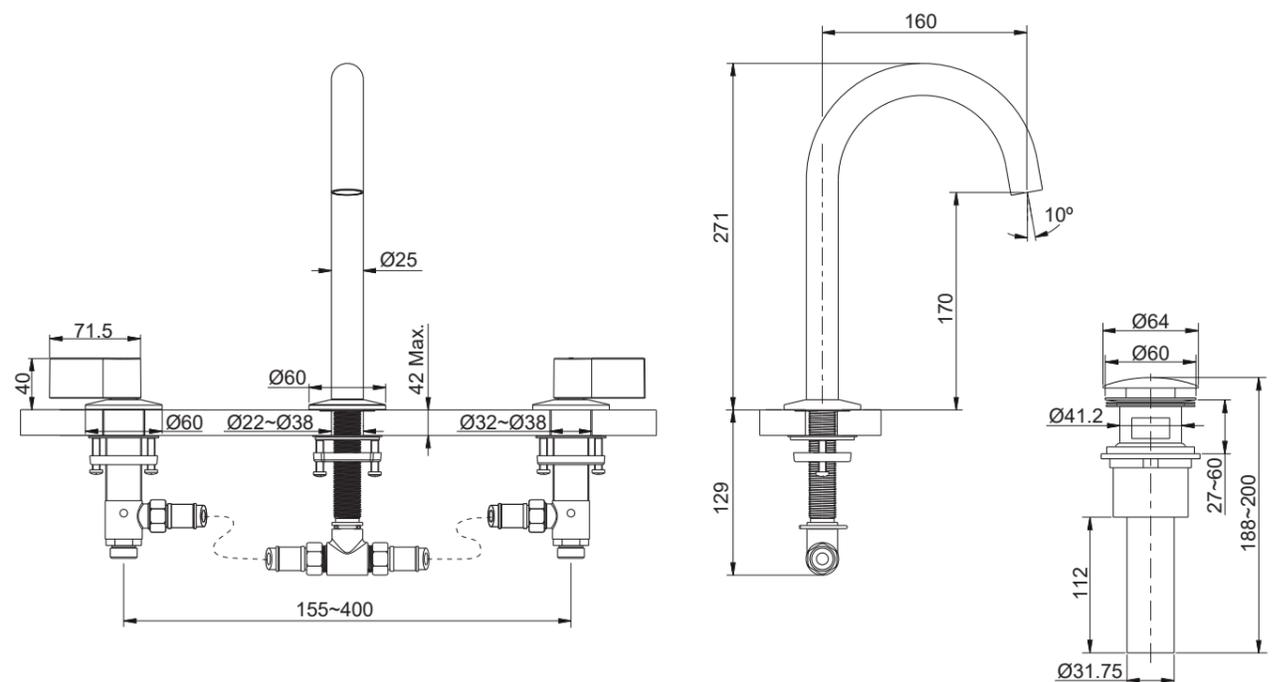

INSTALLATION

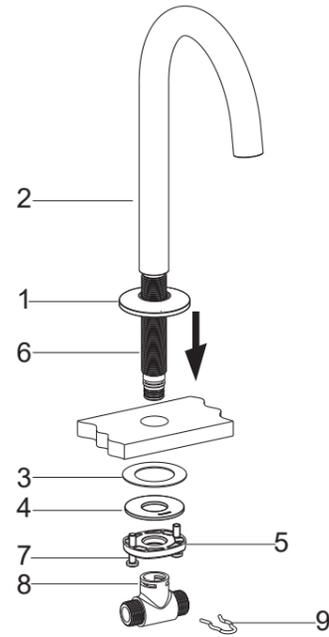


How to Install the Spout

Slide the escutcheon(1) into the bottom of the spout(2). Insert the spout kit into the mounting hole of the lavatory with escutcheon.

From underside of the lavatory, place the washer(3), steel washer(4) and fixing ring(5) onto the shank(6). Position the faucet. Screw the fixing ring. Tighten the screws(7) to secure the spout.

Install the supply tee(8) to the shank and tighten by the hook(9).

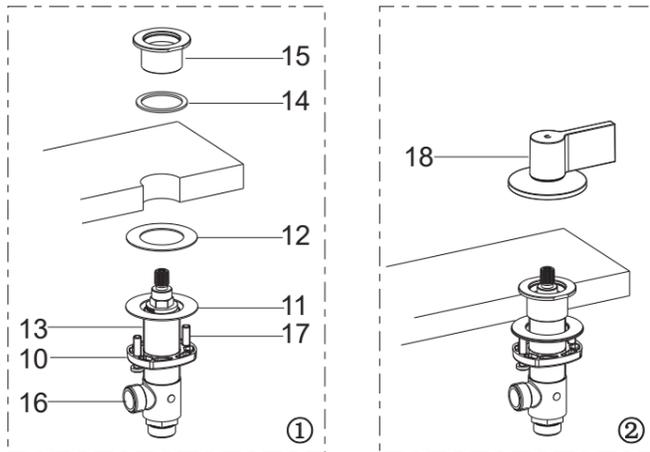

How to Install the Side Bodies and Handles


Put the threaded rings(10), steel washers(11) and washers(12) onto the side bodies(13).

Insert the side bodies into the mounting holes from underside. **NOTE:** The side body with red mark should be installed on left. Put the washers(14) into the groove of the nuts(15). Thread the nuts onto the side bodies.

Adjust the outlet(16) of side bodies to connect hoses easily. Secure the threaded rings by tightening screws(17).


Ensure the valves and handles are in the off position.

Screw the handles(18) onto the nuts. **NOTE:** The handle with "H" should be installed on left.

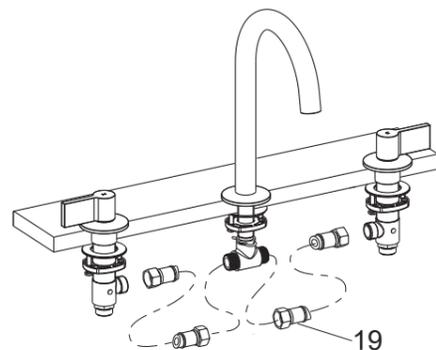

How to Connect the Hoses

Connect the hoses(19) to the supply tees. The other end of the hoses should be connected to the outlet of side bodies.

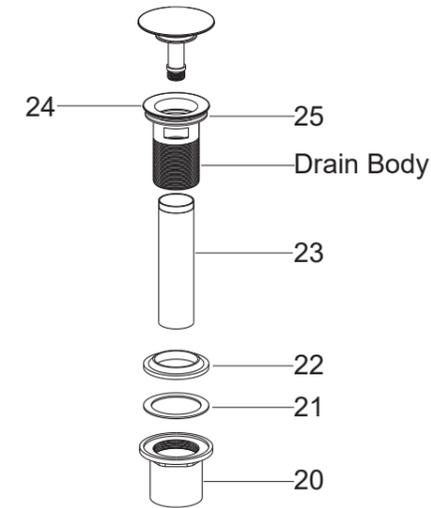


How to Install the Drain

Remove the locknut(20), plastic washer(21), rubber gasket(22) and tailpiece(23) from the drain body. Supply enough tape or sealant to tailpiece thread. Reinstall the tailpiece. Insert the drain body into the lavatory. Install the rubber gasket(Tapered side up), plastic washer and locknut back to the drain body in turn. Tighten the locknut.

NOTE: If needed, apply a ring of plumbers putty or other sealants around the underside of the drain flange(24), instead of using rubber washer(25).

Do not reposition the drain after the locknut is tightened, or you may break the putty or sealant seal.


INSTALLATION CHECKOUT

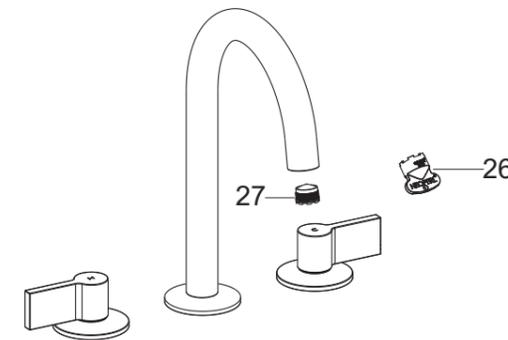

Ensure that all coupling nuts are tight. Ensure that the handles are in the off position.

Turn on the main water supply and drain, and check for leaks. Repair as needed.

Remove the aerator(27) by key(26). Run hot and cold water through faucet for about one minute to remove any debris. Check for leaks. Repair as needed. Remove any debris from the aerator. Shut off the faucet. Reinstall the aerator.

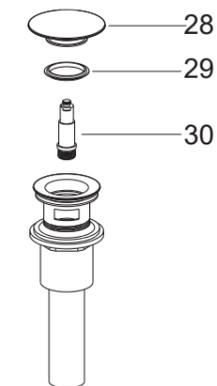

Replace the Washer and Piston Kit

Turn counter-clockwise to remove the stopper(28). Take out washer(29). Replace with a new one. Turn counter-clockwise to remove the piston kit(30). Replace with a new one. Reinstall stopper and washer.

CLEANING INSTRUCTIONS

All Finishes: Clean the finish with mild soap and warm water. Wipe entire surface completely dry with clean soft cloth. Many cleaners may contain chemicals, such as ammonia, chlorine, toilet cleaner etc, which could adversely affect the finish and are not recommended for cleaning.

Do not use abrasive cleaners or solvents on Kohler faucets and fittings.