

### Features

- Reduces lead, mercury, PFOA/PFOS, pharmaceuticals, VOC and more
- Filter head automatically turns off the water supply when cartridge is removed
- Replacing the carbon block VOC filter every 6 months keeps filtration system performing effectively

### Material

- High-impact plastic construction

### Installation

- For cold water use only
- Under-sink
- Quarter-turn twist cartridge for easy installation and replacement





### Codes/Standards

CSA B483.1  
NSF/ANSI 42  
NSF/ANSI 53  
NSF/ANSI 401  
NSF Protocol P231  
IAPMO Certification

### KOHLER® Water Filter Systems Five-Year Limited Warranty

See website for detailed warranty information.

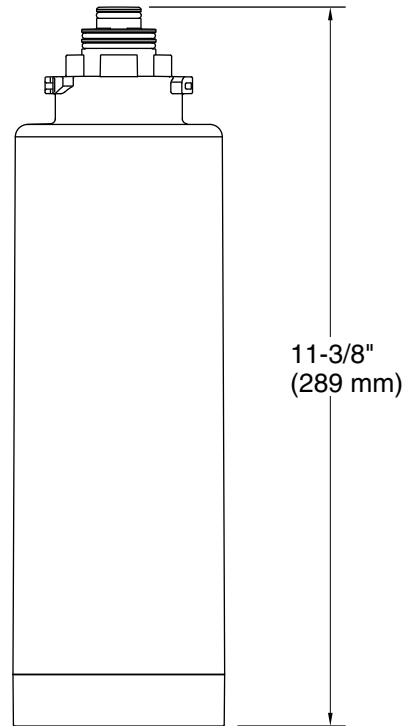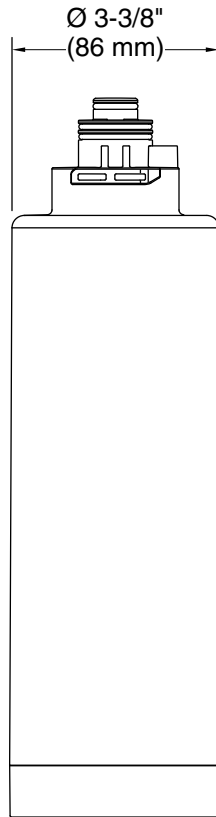

### Technical Information

All product dimensions are nominal.

#### Handshower:

Rated maximum flow: 0 gal/min (0 l/min)

### Notes

Install this product according to the installation instructions.

To prevent the risk of property damage, protect from freezing.

For cold water use only.

To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 6 months.

Application guideline/water supply parameters:

Water Pressure: 40-120 psi (276-827 kPa)

Water Temperature: 33-100°F (0.5-37.8°C)

Capacity: 792 gal (3,000 L)