

### Features

- Significantly reduces bacteria, virus, cyst, chlorine and lead
- Filter head automatically turns off the water supply when cartridge is removed
- Replacing the Ultra-filter every 12 months keeps filtration system performing effectively

### Material

- High-impact plastic construction

### Installation

- For cold water use only
- Under-sink
- Quarter-turn twist cartridge for easy installation and replacement




### Codes/Standards

CSA B483.1  
NSF/ANSI 42  
NSF/ANSI 53  
NSF/ANSI 401  
NSF Protocol P231

### KOHLER<sup>®</sup> Water Filter Systems Five-Year Limited Warranty

See website for detailed warranty information.

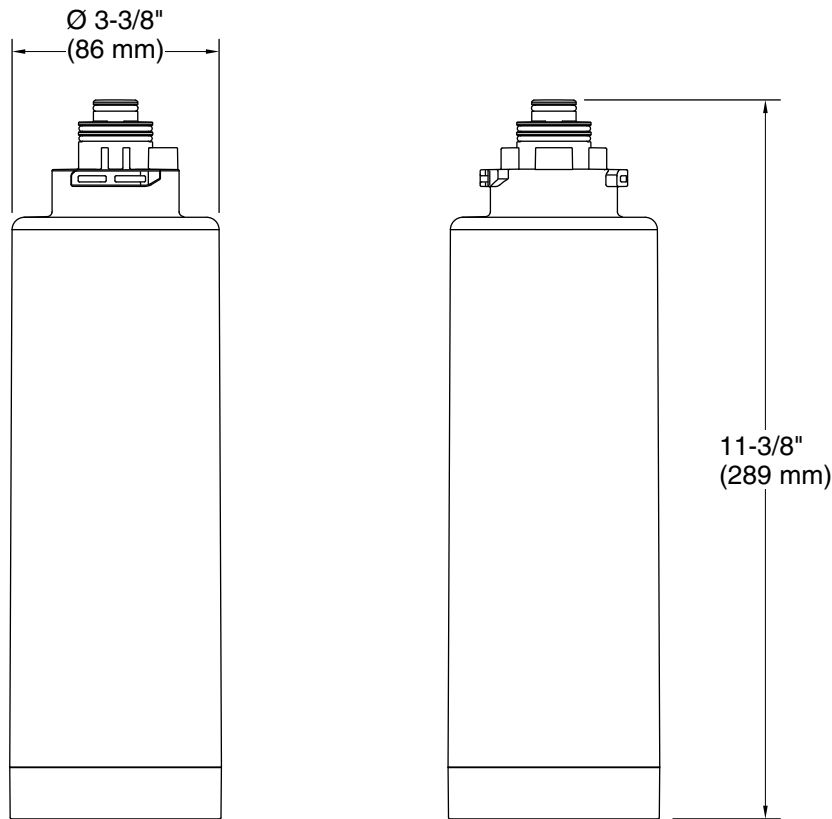

**Technical Information**

All product dimensions are nominal.

**Spout:**

**Notes**

For cold water use only.

To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 6 months.

Application guideline/water supply parameters:

Water Pressure: 40-100 psi (276-689 kPa)

Water Temperature: 40-100°F (4.4-37.8°C)

Capacity: 230 gal (871 L).