# **KOHLER** Faucets

## Wall-mount single-handle bathroom sink faucet, 1.2 gpm

K-26438-4

### **Features**

- A single handle controls both on/off activation and temperature setting
- 7-11/16" (195 mm) spout reach
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- Coordinates with other products in the Tone collection
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System

#### Material

- Premium material construction for durability and reliability
- KOHLER® finishes resist corrosion and tarnishing

### Installation

Wall-mount

### **Recommended Products/Accessories**

K-27425 18" towel bar

K-27426 24" towel bar

K-27427 Robe hook

K-27428 Towel ring

K-27429 Pivoting toilet paper holder

### **Optional Products/Accessories**

K-7107 Decorative Drain

K-7108 Decorative Drain

K-7114 Pop-Up Drain

K-7114-A Pop-Up Drain

K-7127 Drain

K-7127-A Drain

K-7129 Drain

K-7129-A Bathroom sink grid drain with overflow

K-33151 Clicker drain without overflow

K-25322 Clicker drain with overflow





**CSA B651** 

OBC



### Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 61

NSF/ANSI/CAN 372

All applicable US Federal and State material

regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

**IAPMO** Certification

### **KOHLER® Faucet Lifetime Limited** Warranty


See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne
		Brass Matte Black with Moderne









Wall-mount single-handle bathroom sink faucet, 1.2 gpm

K-26438-4

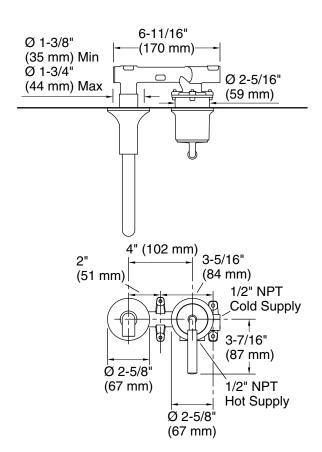

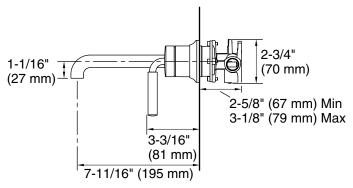

### **Technical Information**

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Drain included: No

Spout:

Spout reach: 8-3/16" (208 mm)

**Handshower:** 

Rated maximum 0 gal/min (0 l/min)

flow:

### **Notes**

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

