# **KOHLER**<sub>®</sub>

### Components™ Frameless pivot shower door K-27583-10L

#### Features

- Frameless design emphasizes glass and creates a sleek, minimalist look
- Full-length magnetic seal keeps door firmly closed, providing excellent water containment
- Continuous 7/8" (22 mm) high aluminum bottom threshold
- Back-to-back 11-3/16" (284 mm) vertical shower door pulls
- Coordinates with other products in the Components collection
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)

#### Material

- Frameless, 3/8" (10 mm) thick Crystal Clear tempered glass
- Anodized aluminum prevents rust and corrosion

#### Installation

- Fits opening widths 29-5/8"-30-3/8" (752-772 mm)
- 3/4" (19 mm) width adjustment
- Out-of-plumb adjustability simplifies installation
- Door can be installed to open to the left or right to suit your bathroom layout
- For residential use only
- Not for use in hospitality

#### **Included Components**

27708-10L 3/8" pivot door glass and hardware, no handle K-27679 11" shower door handle



#### **Codes/Standards**

ANSI Z97.1 CAN/CGSB-12.1 CPSC 16CFR 1201

#### KOHLER<sup>®</sup> Bath and Shower Doors Ten-Year Limited Warranty

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.

**Color Code Description** 



SHP Bright Polished Silver

- BL Matte Black
- BNK Anodized Brushed Nickel

#### Available Glass Options Code Description


L Crystal Clear





## Components™

Frameless pivot shower door K-27583-10L

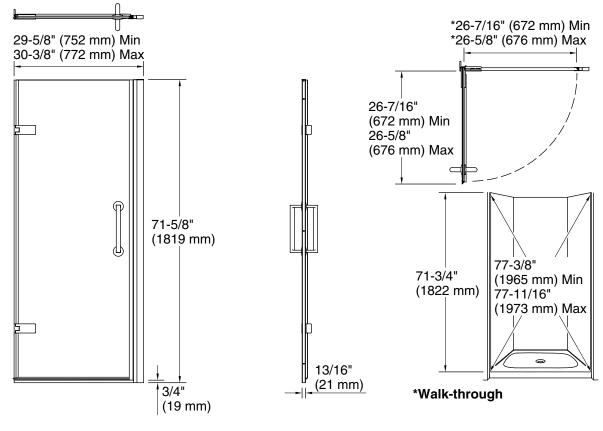

#### **Technical Information**

All product dimensions are nominal. Base-To-Wall 1/4" (6 mm) Radius – Max: Shower Ledge Min 3/4" (19 mm) Flat: Shower Wall Min 2-1/4" (57 mm) Flat: Wall Studs Required Yes for Door:

#### Notes

Install this product according to the installation instructions.

The vertical opening should be a minimum of 73-1/2" (1867 mm) to allow for installation clearance.

