



Tend® | K-28079-ET

Washout half-stall 0.125 gpf urinal, top spud

Features

- Washout urinal
- 3/4" (19 mm) top spud
- 0.125 gpf (0.47 lpf)
- 14-3/4" (375 mm) extended lip
- Extended lip helps keep floor cleaner
- Back wall design provides superior splash containment
- Smooth contours make cleaning fixture fast and easy
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|----|-------------|
| 96 | Biscuit |
| 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-03-2026 19:00 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA, OBC compliant when installed to the specific requirements of these regulations.

This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance.



ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
OBC

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

Technical Information

All product dimensions are nominal.

Spud Size: 3/4", Inlet, Top
Replaceable Trapway: Yes
Trapway Type: Concealed
Flush Rate: 0.125 gpf (0.5 lpf)
Designed for the above water use when installed with a water-saving flushometer.


Pressure/Fixture Supply Requirements

Fixture Flow Rate 1.1 gpm (4.2 l/min)
Minimum:

Material

- Vitreous china



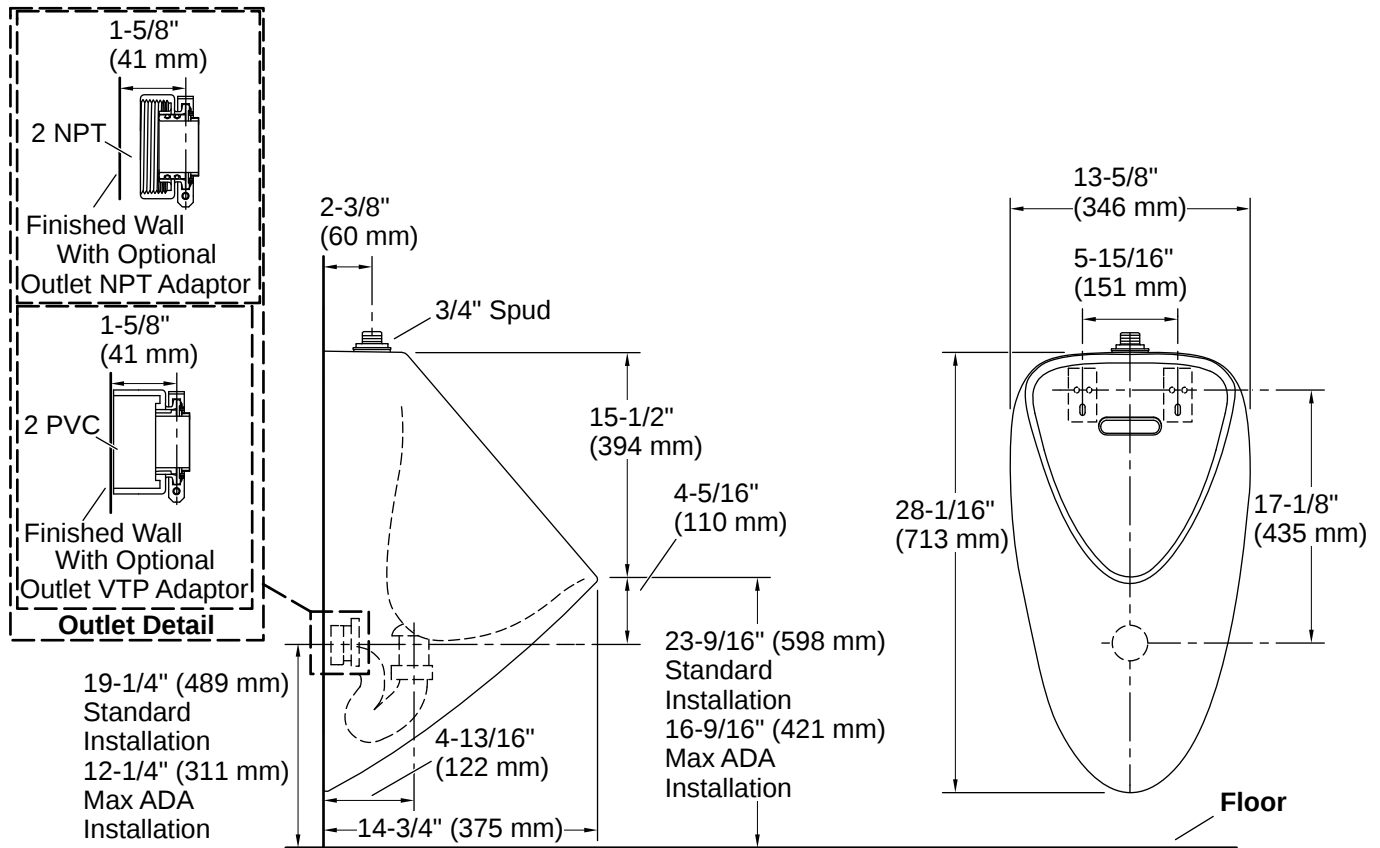

Installation

- Wall-mount
- Trapway secures urinal to wall, eliminating bolts for a faster installation

Installation Notes

Install this product according to the installation instructions.

This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance. ADA, OBC compliant when installed to the specific requirements of these regulations.

