

# HydroRail®-H Shower column K-45904

### Features

- For use in bath/shower and shower only installations
- Designed for new installations or retrofit to replace an existing installed shower arm
- For use with temperature/volume control mixing valve (mixing valve sold separately)
- For use with Kohler handshowers and shower hoses

# Material

- Premium metal construction for durability and reliability
- KOHLER® finishes resist corrosion and tarnishing

# Installation

- Wall-mount
- Installs in less than 60 minutes without changes to in-wall plumbing (subject to condition of existing installation)

#### Recommended Products/Accessories K-23723 Faucet cleaner

K-23/23 Faucet cleaner

### **Optional Products/Accessories**

K-8593 72" Shower Hose K-9514 60" Shower Hose K-45981 72" ribbon hose K-45982 60" ribbon hose 1194630 1/2" NPT Deep Rough-in Kit 1187917 1/2" NPT Shallow Rough-in Kit 1194302 Large Escutcheon/Mounting Collar Kit



# ADA

Codes/Standards ASME A112.18.1/CSA B125.1 ADA

IAPMO Certification

# KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

# **Available Colors/Finishes**

Color tiles intended for reference only.


### Color Code Description

CP Polished Chrome SN Vibrant® Polished Nickel AF Vibrant® French Gold ΒN Vibrant® Brushed Nickel ΒV Vibrant® Brushed Bronze BL Matte Black Vibrant® Brushed Moderne 2MB Brass TΤ Vibrant Titanium



# KOHLER. Faucets

HydroRail®-H Shower column K-45904

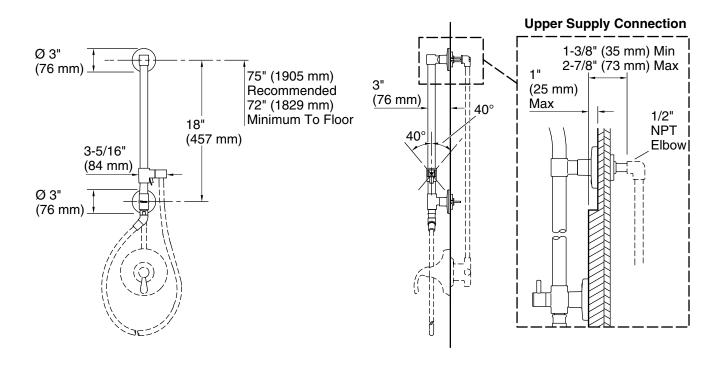

**NOTE:** Valve trim and hose illustrated for dimensioning only, not included in the product.

No

### **Technical Information**

All product dimensions are nominal.

Drain included:

#### Handshower:

Rated maximum 0 gal/min (0 l/min) flow:

### Notes

Install this product according to the installation guide.

Order deep roughing-in kit 1194630 if the distance from the elbow to the finished wall surface is between 2-7/8" (73 mm) to 4" (102 mm).

Order shallow roughing-in kit 1187917 if the distance from the elbow to the finished wall surface is less than 1-3/8" (35 mm).

A 3" (76 mm) escutcheon/mounting collar is supplied to fit a 1" (25 mm) to 1-1/4" (32 mm) supply connection hole diameter. Order 1194302 large escutcheon/mounting collar kit if the supply connection hole diameter is between 1-1/4" (32 mm) to 2-1/4"#(57 mm).

ADA compliant when installed to the specific requirements of these regulations.

