

### Features

- Digitally controlled
- High-temperature limit setting for added safety
- One-touch control of two valve outlets
- Low-profile design
- Selectable water-saving functionality
- Selectable Fahrenheit or Celsius
- Eco mode limits use to only one outlet selectable at any time
- Easy-to-read LCD display and raised one-touch buttons
- Integrated diverter lets you toggle between two water outlets
- Digital thermostatic valve ensures safe and accurate temperature control
- Warm-up mode reaches set temperature and then pauses until you're ready
- Pause function stops water flow for up to two minutes
- Countdown mode allows you to set shower duration to save and manage time and water use
- Ideal for new installation or retrofit to existing shower

### Installation

- Mounts on finished wall surface
- Install valve up to 20' away from the digital interface with cable supplied. Distance can be extended with a standard RJ-11 phone extension cord

### Required Products/Accessories

K-528-PM Two-port digital thermostatic valve




ADA

### Codes/Standards

UL 1951  
CSA C22.2 No. 14  
CSA C22.2 No. 68  
ADA  
ICC/ANSI A117.1  
cUL Listed  
UL Listed

### KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty

See website for detailed warranty information.

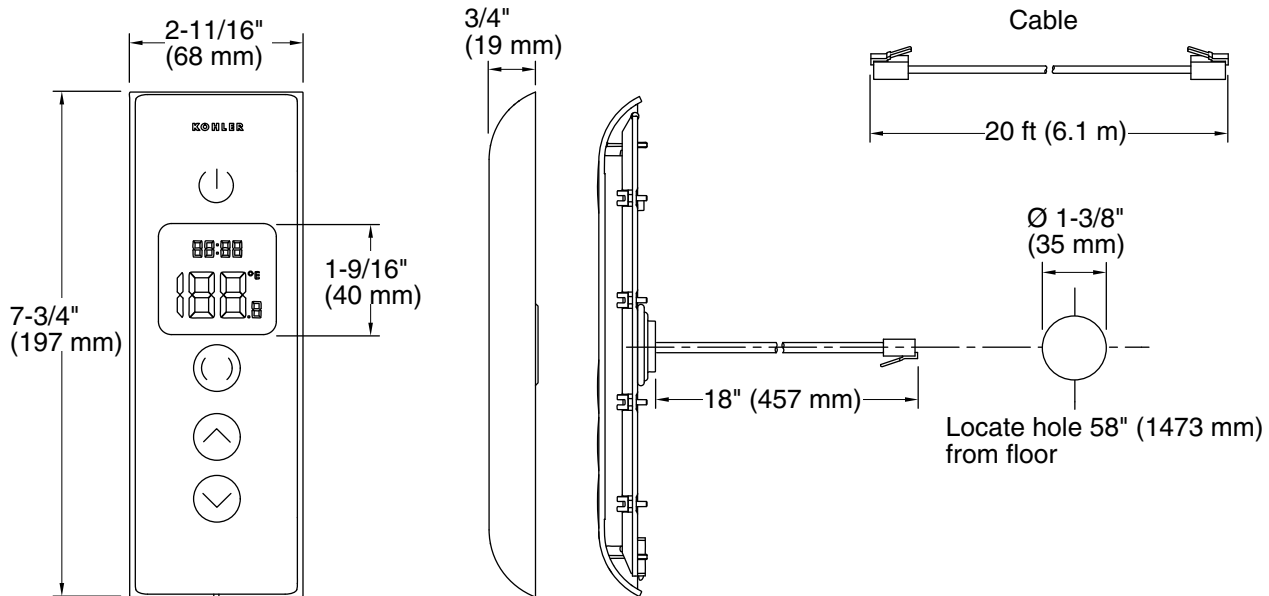

### Technical Information

All product dimensions are nominal.

### Notes

Install this product according to the installation instructions.

Recommended installation height of 58" (1473 mm) from floor to center of interface.

ADA compliant when installed to the specific requirements of these regulations.