KOHLER_®

Composed™

62" H sliding bath door with 3/8"-thick glass K-701694-L

Features

- Sleek, exposed roller design allows for effortless opening and closing of the sliding panel
- Frameless design emphasizes glass and creates a sleek, minimalist look
- Controlled Close[®] innovative soft-close with doubledampening technology eliminates slamming and brings door to a secure close
- Back-to-back 11-1/2" (292 mm) vertical handles
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)

• Coordinates with other products in the Composed[®] collection

Material

- Frameless, heavy 3/8" (10 mm) thick Crystal Clear tempered glass door and in-line panel
- Anodized aluminum prevents rust and corrosion

Installation

- 62" (1575 mm) high, with 58-7/8" (1495 mm) minimum head clearance above bath rim
- Fits opening widths 56-1/8"–59-7/8" (1426 mm–1521 mm)
- 3-3/4" (95.25 mm) width adjustment
- Out-of-plumb adjustability simplifies installation
- Door can be installed to open to the left or right to suit your bathroom layout
- For residential use only
- Not for use in hospitality
- Not for use with cast iron baths



Codes/Standards

ANSI Z97.1 CAN/CGSB-12.1 CPSC 16CFR 1201

KOHLER[®] Bath and Shower Doors Ten-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description



SHP Bright Polished Silver

- BNK Anodized Brushed Nickel
- BL Matte Black


Available Glass Options Code Description

L Crystal Clear





Composed[™] 62" H sliding bath door with 3/8"-thick glass K-701694-L

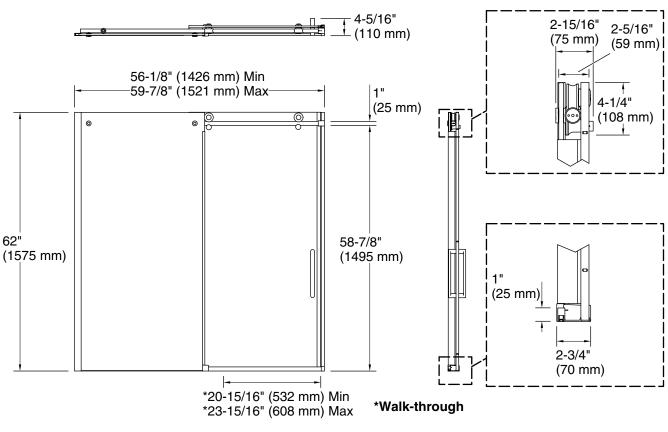

Technical Information

All product dimensions are nominal. Base-To-Wall 3/8" (10 mm) Radius – Max: Shower Ledge Min 2-3/4" (70 mm) Flat: Shower Wall Min 2-3/4" (70 mm) Flat: Wall Studs Required Yes for Door:

Notes

The vertical opening should be a minimum of 64" (1626 mm) to allow for installation clearance.

