



# Wellcomme™ Ultra

Commercial toilet with Mach® Tripoint® flushometer  
K-PR96053-T5D

## Features

- Fixture and touchless flushometer combination is engineered for optimal performance
- Elongated bowl offers added room and comfort
- 2-1/8" (54 mm) fully glazed trapway
- 10" x 7" (254 mm x 178 mm) water surface
- 10" or 12" (254 or 305 mm) rough-in
- 1.6 gpf (6.0 lpf)
- Flush valve activation distance is factory-set
- No external flush volume adjustment ensures water conservation
- 24-hour automatic sentinel flush keeps trapway fresh
- Mechanical override enables flushometer to be used manually even during a power outage
- Chloramine and chlorine resistance on all rubber components exposed to waterway
- Locking stop cap provides protection against vandalism
- Powered by 1.5V AA lithium batteries
- For this combination, order K-96053 bowl and K-10TD00R10 flushometer

## Material

- Vitreous china bowl
- Brass flush valve with durable Polished Chrome finish

## Technology

- Electronic infrared sensor with Tripoint® technology for accurate activation
- Designed to outperform competitors in bowl cleanliness and plug resistance

## Installation

- Seat sold separately



## Codes/Standards


ASME A112.18.1/CSA B125.1  
ASME A112.19.2/CSA B45.1  
ASSE 1037/ASME A112.1037/CSA B125.37  
DOE - Energy Policy Act 1992  
IAPMO Certification

## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.



**Wellcomme™ Ultra**  
Commercial toilet with Mach® Tripoint® flushometer  
**K-PR96053-T5D**

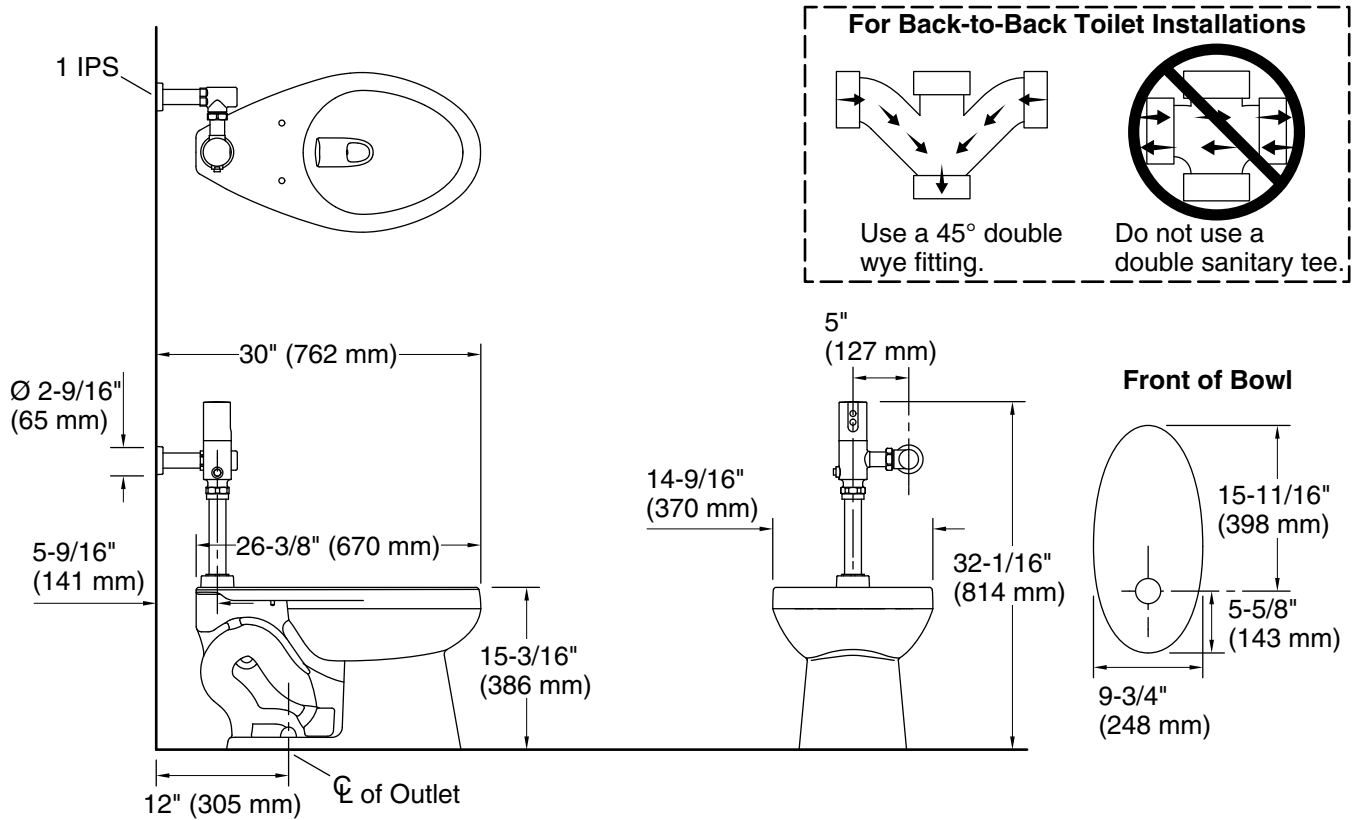

**Technical Information**

- All product dimensions are nominal.
- Toilet type: Floor-mount
  - Waste Outlet: Floor
  - Bowl shape: Elongated
  - Flush type: Flushometer valve siphon
  - Spud size: 1 1/2, Inlet, Top
  - Trap passageway: 2-1/8" (54 mm)
  - Water surface size: 10" x 7" (254 mm x 178 mm)
  - Rim to water surface: 6" (152 mm)
  - Rough-in: 12" (305 mm)
  - Seat-mounting holes: 5-1/2" (140 mm)

**Fixture Supply Requirements**

- Min static pressure: 35 psi (241.3 kPa)
- Max static pressure: 80 psi (551.6 kPa)
- Min flowing pressure: 25 psi (172.4 kPa)

Min flow rate: 25 gpm (94.6 lpm)

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada

7-3-2024 20:00 - US

**Notes**

Install this product according to the installation instructions.

