### **KOHLER** Faucets

## Purist® Shelf-back Lavatory Faucet K-T11839

#### **Features**

- 0.5 gpm (1.9 lpm) maximum flow rate
- This is trim set only. It requires valve kit to complete the faucet
- Vandal-resistant aerator
- 9" (229 mm) spout reach
- Less drain
- Complies with the Safe Drinking Water Act (SDWA)
- On-demand on and off control. Valve kit is factory-set to 30second maximum continual run cycle



Brass

#### Technology

- Valve kit has electronic Insight<sup>™</sup> sensor technology for accurate and consistent activation
- This trim set can be used with 11830-NA (Hybrid-DC power) wall mount valve or 11843-NA (AC Power) wall mount valve

#### Installation

- Single-hole spout mounting. Please consider appropriate distance between spout and sensor
- Below the counter valve for easy installation and maintenance

#### Required Products/Accessories

K-11830 Wall-mount Valve for Touchless Faucets

or

K-11843 Wall-mount Valve for Touchless Faucets

#### **Recommended Products/Accessories**

K-23726 Drain treatment K-23723 Faucet cleaner

#### **Optional Products/Accessories**

1160593 .35 gpm Aerator, Small



ADA CSA B651 OBC

#### Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992 California Energy Commission (CEC)

ICC/ANSI A117.1

CSA B651

OBC

**IAPMO** Certification

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

#### **Available Colors/Finishes**


Color tiles intended for reference only.

Color	Code	Description
	СР	Polished Chrome
	VS	Vibrant® Stainless





# Purist® Shelf-back Lavatory Faucet K-T11839

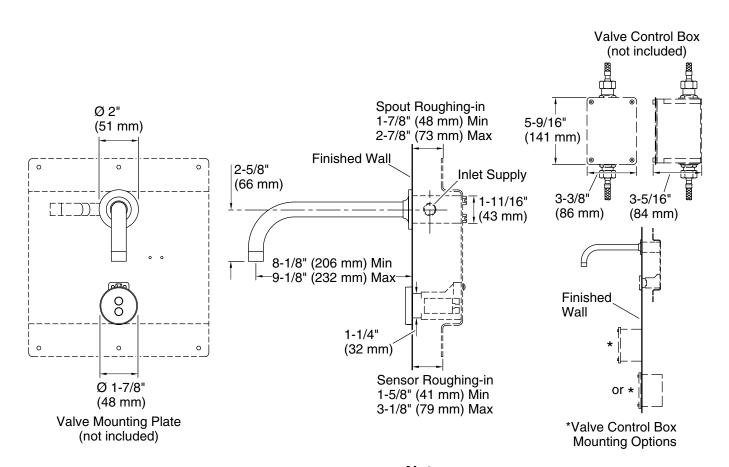

#### **Technical Information**

All product dimensions are nominal.

Faucet:

Flow rate: 0.5 gal/min (1.9 l/min)

Drain included: No

Spout:

Spout reach: 2-5/8" (66 mm)

Handshower:

Rated maximum 0 gal/min (0 l/min)

flow:

#### **Notes**

Install this product according to the installation guide.

The sensor roughing-in allows for installation to a back splash or thicker finished wall than the spout roughing-in.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

