

Rite-Temp® shower valve trim with diverter K-T5319-4

#### **Features**

- Includes faceplate with handle, shower arm with flange and showerhead
- Single lever handle allows for both on/off activation and temperature setting
- Integrated push-button diverter
- Coordinates with Refinia faucets, accessories, and showering components to complete your bathroom
- Includes single-function 2.5 gpm (9.5 lpm) showerhead with Katalyst® air-induction technology
- MasterClean<sup>™</sup> sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations

#### Material

- Premium material construction with metal handle ensures reliability and durability
- KOHLER finishes resist corrosion and tarnishing

#### Installation

 Trim only; requires valve to complete installation (sold separately)

## **Required Products/Accessories**

K-11748 Series Rite-Temp® Valves





#### Codes/Standards


ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.



# Rite-Temp® shower valve trim with diverter K-T5319-4

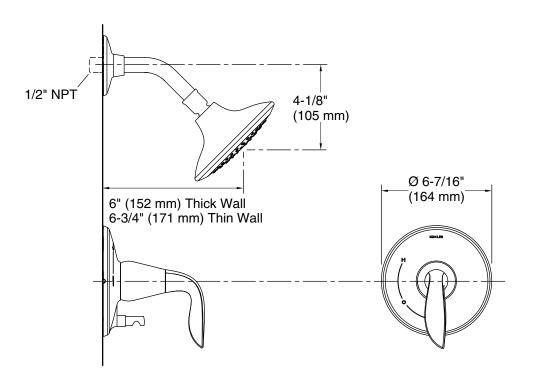

### **Technical Information**

All product dimensions are nominal.

Shower/Rainhead rated max flow: 2.5 gal/min (9.5 l/min)

#### **Notes**

Install this product according to the installation instructions.

Avoid cross-flow conditions. Do not install shutoff device on either valve outlet.

Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between the valve and wall-mount spout.

