

Margaux® Rite-Temp® shower trim kit, 2.5 gpm K-TS16234-4

Features

- A single handle controls both on/off activation and temperature setting
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Includes single-function 2.5 gpm (9.5 lpm) showerhead with Katalyst[®] air-induction technology
- Antiscald protection
- Includes faceplate, shower arm with flange, and ADAcompliant metal Level handle
- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations
- Coordinates with Margaux faucets, accessories, and showering components to complete your bathroom
- THIS NEW K-TS16234-4 TRIM REPLACES THE EXISTING K-T16234-4 TRIM. THE NEW TRIM IS IDENTICAL AND INCLUDES TRIM ADAPTER KITS FOR BOTH RITE-TEMP K-304/K-2971 HIFLOW AND THE NEW K-8304 SERIES VALVE

Material

- Premium material construction for durability and reliability
- KOHLER® finishes resist corrosion and tarnishing

Installation

Trim only; requires valve to complete installation (sold separately)

Required Products/Accessories

K-8304 Series Rite-Temp $\ensuremath{\mathbb{R}}$ Valve & Cartridge Kits or

K-8300 Series Rite-Temp® Valve Body Rough-ins K-8305 Series Rite-Temp® Cartridges

Recommended Products/Accessories

K-23723 Faucet cleaner

Optional Products/Accessories

K-10350 Deep rough-in kit K-10351 Test cap for K-8300 Series valve bodies





Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 IAPMO Certification


KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.



KOHLER, Faucets

Margaux® Rite-Temp® shower trim kit, 2.5 gpm K-TS16234-4

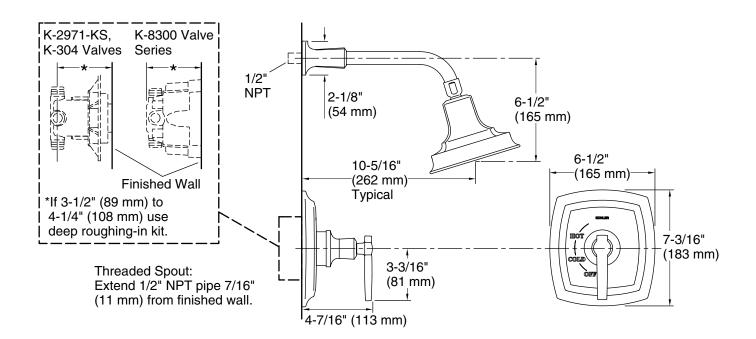

Technical Information

All product dimensions are nominal. No

Drain included:

Handshower:

Rated maximum 0 gal/min (0 l/min) flow:

Showerhead/Body Spray:

Rated maximum 2.5 gal/min (9.5 l/min) flow:

Notes

Install the product according to the installation guide.

NOTICE: Risk of product damage. Long screws, for installing trim, can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

