# **KOHLER** Faucets

# **Honesty®** Rite-Temp® valve trim K-TS99761-4

#### **Features**

- Includes faceplate with handle
- A single handle controls both on/off activation and temperature setting
- Complements Honesty faucets and accessories

#### Material

- Premium material construction with metal handle ensures reliability and durability
- KOHLER® finishes resist corrosion and tarnishing

#### Installation

Trim only; requires valve to complete installation (sold separately)

## **Required Products/Accessories**

K-8304 Series Rite-Temp® Valve & Cartridge Kits

K-8300 Series Rite-Temp® Valve Body Rough-ins K-8305 Series Rite-Temp® Cartridges

K-28304-K Thermostatic valve body and cartridge kit

or

K-28304-KSL Thermostatic valve body and cartridge with loose stops

or

K-28304-KS Thermostatic valve body and cartridge with

#### Recommended Products/Accessories

K-23723 Faucet cleaner

### **Optional Products/Accessories**

K-10350 Deep rough-in kit

K-10351 Test cap for K-8300 Series valve bodies



**CSA B651** ADA OBC

#### Codes/Standards

ASME A112.18.1/CSA B125.1 ADA ICC/ANSI A117.1 CSA B651 OBC **IAPMO** Certification

# **KOHLER® Faucet Lifetime Limited** Warranty

See website for detailed warranty information.


## **Available Colors/Finishes**

Color tiles intended for reference only.

| Color | Code | Description                       |
|-------|------|-----------------------------------|
|       | CP   | Polished Chrome                   |
|       | BN   | Vibrant® Brushed Nickel           |
|       | BL   | Matte Black                       |
|       | 2MB  | Vibrant® Brushed Moderne<br>Brass |



# **KOHLER**, Faucets

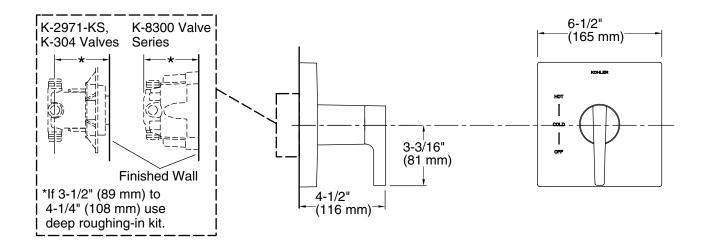

### **Technical Information**

All product dimensions are nominal.

#### Handshower:

Rated maximum flow:

0 gal/min (0 l/min)

# **Notes**

Install the product according to the installation guide.

NOTICE: Risk of product damage. Long screws for installing trim can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

