


KOHLER®

SERVICE KIT INSTRUCTIONS


BLOWER SERVICE KIT
1036212

The junction box should be wired as shown.

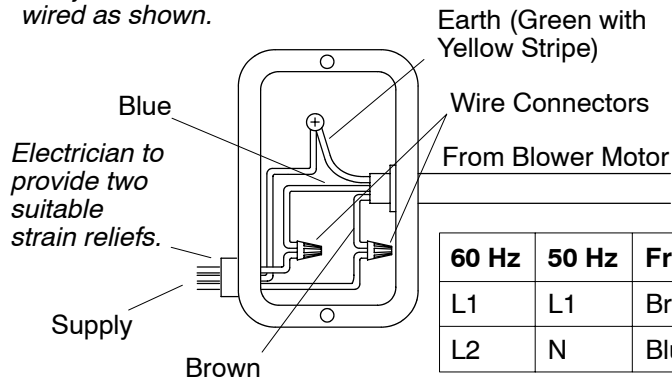

| 60 Hz | 50 Hz | From Blower |
|-------|-------|-------------|
| L1 | L1 | Brown |
| L2 | N | Blue |

Bond in accordance with national and local codes.

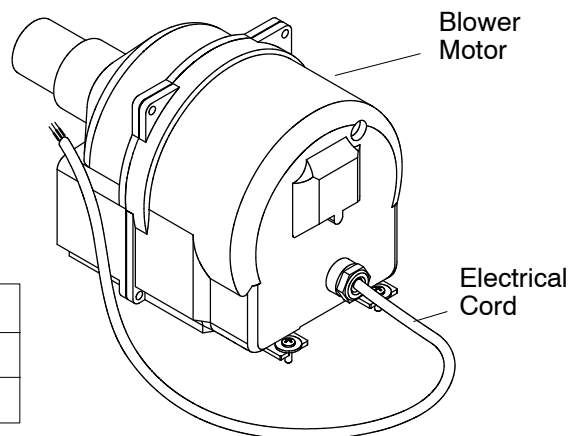

Remove the Old Blower Assembly

- ⚠ DANGER: Risk of electrical shock.** Disconnect power before servicing.
- With the bath drained, turn power leading to the unit off.
 - Open the junction box cover. Note the wiring harness connections and disconnect the blower electrical harness.
 - Remove any cable ties that support the blower motor cord.
 - Remove the retaining screw on the tee next to the blower motor.
 - Remove the four mounting screws from the blower motor and remove the blower from the area.

Install the New Blower Assembly

- Install the blower in the original location. Install the four mounting screws.
- Route the blower motor electrical cord to the junction box.
- Connect the wiring in the junction box as shown in the above diagram.
- Install the junction box cover.
- Connect the the blower to the tee. Use silicone or equivalent sealant at the connections and install retaining screw.
- Replace any cable ties that supported the blower motor cord.
- Restore power to the unit and check for leaks.

USA: 1-800-4-KOHLER
Canadá: 1-800-964-5590
México: 001-877-680-1310
kohler.com

THE BOLD LOOK
OF **KOHLER**®

©2004 Kohler Co.

1036213-9-B