

C³®-201 | K-4744

Nightlight Quiet-Close™ elongated bidet toilet seat

Features

- Continuously heated water for consistent comfort
- Front and rear wash modes provide warm water for cleansing
- Remote control with two programmable user presets
- Heated seat with adjustable temperature settings
- LED lighting illuminates the bowl to serve as a nightlight
- Warm-air drying system with adjustable air speed and temperature
- Energy-save function
- Quiet-Close™ elongated lid and seat prevents slamming
- Quick-Release™ functionality allows seat to be removed easily from toilet for convenient cleaning
- Warm-air drying with three temperature and fan-speed settings
- A sensor ensures the user is seated before functions are activated
- Can only be used with the K-6304 or K-6300



Codes/Standards

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

ASME A112.4.2/CSA B45.16

CSA C22.2 No. 64

CSA C22.2 No. 68

Warranty

See website for detailed warranty information.

KOHLER® Intelligent Toilet and C3® Cleansing Seat Three-Year Limited Warranty

Technical Information

All product dimensions are nominal.

Seat Shape Type:	Elongated
Seat Front Type:	Closed-front
Seat-Mounting Holes:	5-1/2" (140 mm)

Material

- Plastic construction

Required Products/Accessories

- K-6304 Wall-hung compact elongated toilet, dual-flush

Required Electrical Service


One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Bidet toilet seat:	120 V, 15 A, 60 Hz
--------------------	--------------------

Electrical Component Ratings

Bidet toilet seat:	120 V, 15 A, 60 Hz
Power Cord Length:	46" (1168 mm)



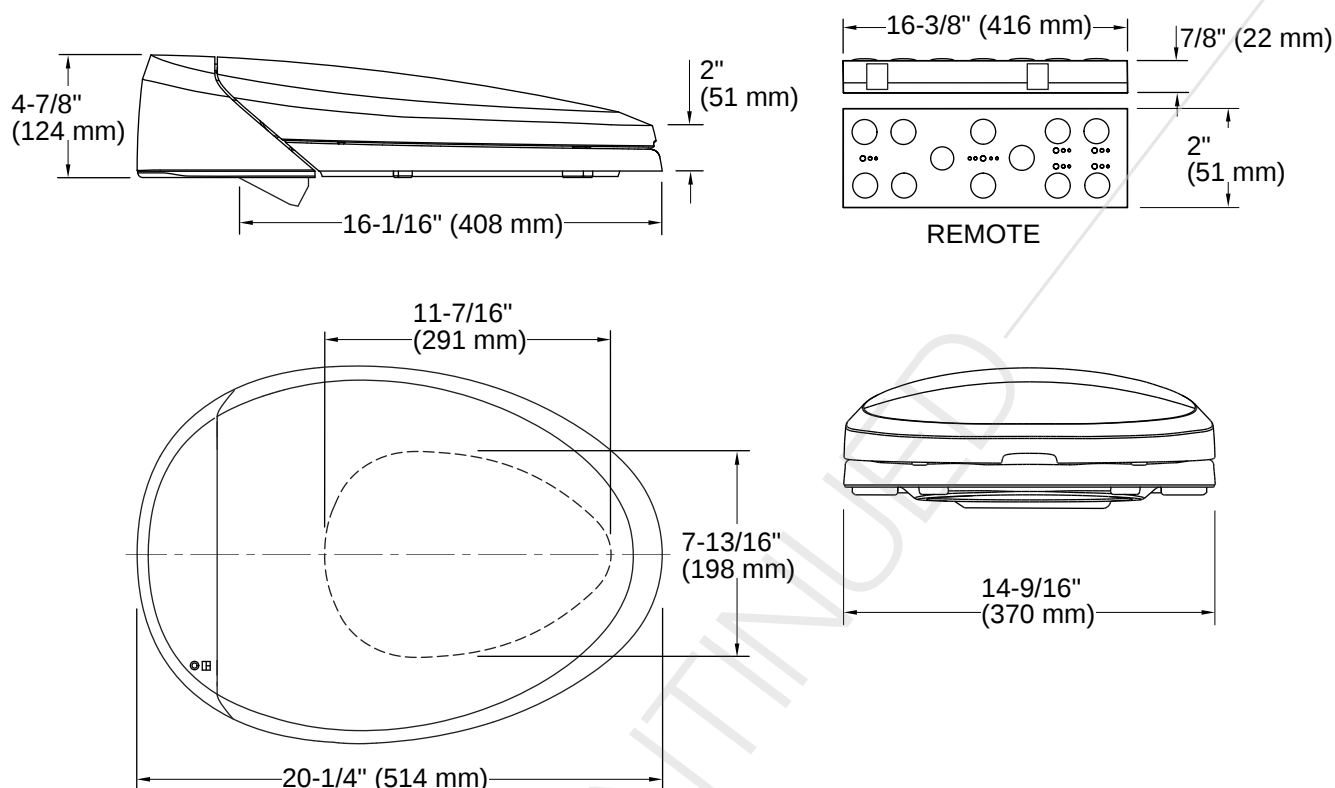

Installation Notes

Install this product according to the installation instructions.

CAUTION: Risk of property damage. A single extension cord may be used provided the cord "Type" begins with "SJ", 12 gauge, grounded (12/3), no longer than 25 feet, and plugged into a GFCI outlet. Promptly replace any extension cord that exhibits any sign of damage.

