



48" bathroom vanity cabinet K-99535-LG

Features

- Catalyzed conversion varnish provides a durable moistureresistant finish
- Two doors and six drawers
- Frameless construction with full-overlay doors and drawers
- Three-way adjustable slow-close door hinges for easy cabinet access
- Full-extension 18" (457 mm) depth drawers with soft-close undermount slides for smooth opening
- Solid wood drawers with dovetail construction
- Legs offer the polished look of furniture in the bathroom
- Customize your storage with optional accessories such as shelves, trays, drawer dividers, and medicine cabinets (sold separately)

Material

- Solid wood and veneers
- Wood is a living material, and its beauty is enhanced by natural variations in grain, color, and pattern. No two pieces of wood are exactly the same, and the color will change with age, temperature, and exposure to light
- The nature of wood grain can cause variations in stain depth. Available Colors/Finishes Our expert craftspeople hand-apply the stain to blend these variations

Required Products/Accessories

K-20000 20-1/2" rectangular undermount bathroom sink K-28253 Silestone® 49" quartz vanity top with rectangular cutout

K-28264 Silestone® quartz 49" backsplash

K-33585 Drawer organizer set

K-99677-SH10 Adjustable shelf for 48" KOHLER Tailored® vanities

K-99681 Electrical outlets for KOHLER Tailored® vanities

K-99687 3/4" cabinet pull



Codes/Standards

EPA TSCA Title VI/CARB P2

KOHLER® One-Year Limited Warrantv

See website for detailed warranty information.

Color tiles intended for reference only.


Color	Code	Description
	1WB	Claret Suede
	1W/T	Mohair Grev







48" bathroom vanity cabinet **K-99535-LG**

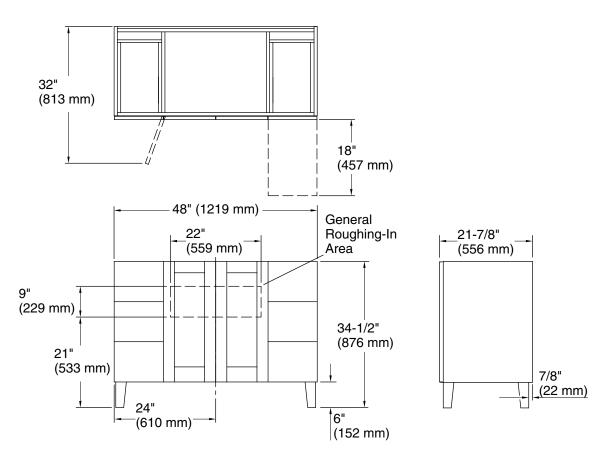

Technical Information

All product dimensions are nominal.

Vanity type: Standard

Notes

Install this product according to the installation guide.

Decorative cabinet hardware is not supplied. Refer to the KOHLER bath accessories line for recommended cabinet hardware to complement your vanity.

Select the type of fastener based upon the wall material. Two 250 lb (113.4 kg) minimum load bearing fasteners are recommended.

